

Wall split system V Design

A+++ Cooling SEER 8.5
A++ Heating SCOP 4.6



ENERGY SAVING



R32 gas



Night mode



Energy saving mode



1W Standby



ECO mode

HEALTH



Dust filter



Self-cleaning



Biofilter



Anti-corrosion protection - gold coating



Ionizer

RELIABILITY



Cooling at a temp. of -15°C



Heating at a temp. of -25°C



3D DC Inverter



Error detection and display



Coolant leak detection sensor



Emergency function



The protective cover of the valve



Chasis Heating Belt



Compressor Heating Belt



Intelligent defrosting



Operation at low voltage

COMFORT AND CONVENIENCE



Last mode memory



Timer



Louver Position Memory



Whisper air



3 air flow speeds



Heating at 8°C



Automatic operating mode



Turbo



Digital display



3D air flow



Manual control



I Feel function



Silent operation



Two-way condensate drain hose



Auto swing



12 air flow speeds



Soft start



Wi-Fi ready




Mono and multi compatibility

	Model	ACP-12CH35AEVIs R32
Cooling	Capacity (W)	3517 (1377-4308)
	Energy efficiency class	A+++
	Energy Efficiency SEER	8.5
	Cooling operating range	-15 °C ≤ T ≤ 50 °C
	Estimated load on cooling (W)	3500
	Power input (W)	1034 (130-1650)
Heating	Capacity (W)	3810 (1067-4381)
	Energy efficiency class	A++
	Energy Efficiency SCOP	4.6
	Heating operating range	-25 °C ≤ T ≤ 30 °C
	Estimated load on heating (W)	2500
	Power input (W)	1030 (160-1560)
Indoor unit	Air flow (m³/h) - HI / MID / LOW	558 / 478 / 384
	Dehumidifying capacity (L/h)	1.2
	Noise - Sound Pressure (dB(A)) - HI / MID / LOW	37.5 / 32 / 24
	Volume under standard conditions (dB)	≤ 51
	Packaging dimensions (mm)	985 x 265 x 385
	Device dimensions (mm)	897 x 182 x 312
	Gross / net weight (kg)	14.2 / 10.5
Outdoor unit	Noise - Sound Pressure (dB(A))	≤ 54
	Volume under standard conditions (dB)	≤ 60
	Coolant	R32
	Bracket distance (mm)	452
	Packaging dimensions (mm)	887 x 337 x 610
	Device dimensions (mm)	765 x 303 x 555
Gross / net weight (kg)	29.1 / 26.7	
Connections	Liquid phase pipe diameter	1/4"
	Gas phase pipe diameter	3/8"
	Maximum pipe length (m)	25
	Maximum height difference (m)	10
	Pre-filled pipe length (m)	5
	Gas refill (g/m)	12
Power Supply	Power interconnect cable (mm²)	5 x 1.5
	Power Supply IU/OU 220-240V/1/50Hz (mm²)	3 x 1.5



COLOR PANEL

In addition to the attractive mirror design of the V design air conditioner in 2 colours, different LED lighting shows in which mode the device is located. It illuminates blue in cooling mode and red in heating mode.

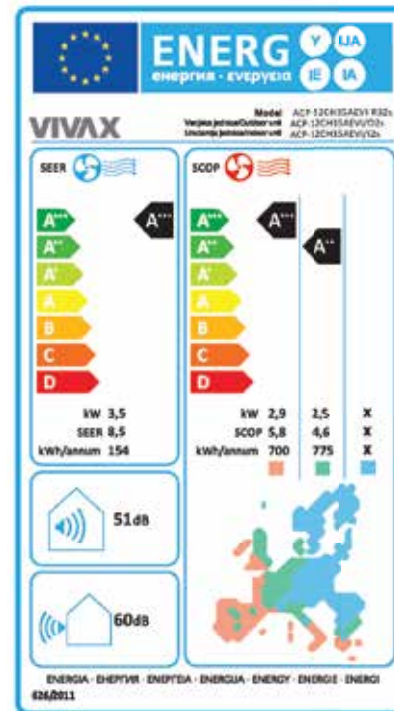

A+++ | A++

A +++ energy class in cooling and A ++ energy class in heating ensure superior energy efficiency with significant energy savings.

3D AIR FLOW

The directional air outlet automatically moves horizontally and vertically directing the air flow to fill every corner of the room.

